

## Technical Specifications (In-Cash Procurement)

# Technical Specification of the Boronization system gas supply system and XRCS Gas supply system

Technical Specification of the Boronization system gas supply system and XRCS Gas supply system. The scope includes Design, Gate Review implementation, Manufacture, delivery and optional installation

## SUPPLY

NOTE: This version includes tracked changes per review comments (RO mandatory reviewer, PL approver, clarifications on spare parts, materials, QA procedure 22MFG4, date corrections, and standards editions). All edits are visible for acceptance.

## Table of Contents

<b>1</b>	<b>PREAMBLE .....</b>	<b>4</b>
<b>2</b>	<b>PURPOSE .....</b>	<b>4</b>
<b>3</b>	<b>ACRONYMS &amp; DEFINITIONS .....</b>	<b>4</b>
3.1	Acronyms .....	4
3.2	Definitions .....	5
<b>4</b>	<b>APPLICABLE DOCUMENTS &amp; CODES AND STANDARDS.....</b>	<b>6</b>
4.1	Diagram.....	6
4.2	Applicable Documents .....	6
4.3	Applicable Codes and Standards.....	9
<b>5</b>	<b>SYSTEM OVERVIEW .....</b>	<b>10</b>
5.1	System component classifications .....	11
5.1.1	Boronization Gas Cabin .....	11
5.1.2	Boronization Piping Network .....	11
5.1.3	Boronization Gas Valve Boxes and Vacuum Extensions .....	12
5.2	Contract Gates .....	12
<b>6</b>	<b>SCOPE OF WORK – DESIGN .....</b>	<b>12</b>
6.1	Scope overview and requirements .....	14
6.1.1	Overview .....	14
6.1.2	Design requirements .....	16
6.1.2.1	General .....	16
6.1.2.2	Licencing.....	16
<b>6.1.3</b>	<b>Safety Requirements .....</b>	<b>17</b>
6.1.4	Design - Analyses .....	19
6.1.4.1	Design – Mechanical piping system .....	20
6.1.4.2	Design – Mechanical Gas cabin.....	20
6.1.4.3	Design -Mechanical Boronization gas valve boxes .....	20
6.1.4.4	Design - Constructability .....	20
6.1.4.5	Design - Performance.....	21
6.1.4.6	Design - Seismic .....	21
6.1.4.7	Design - RAMI .....	21
6.1.4.8	Design - Environmental conditions .....	21

**SUPPLY**

6.1.4.9	Design - HAZOP .....	21
6.1.4.10	Design - Cubicles .....	21
6.1.4.11	Design - Deliverables .....	21
6.1.4.12	CM and DM models .....	21
6.1.4.13	Design Review and Design Integration Review .....	21
6.1.4.14	Chit management and closure .....	22
6.1.4.15	Standardization .....	22
6.1.4.16	Operation and maintenance .....	22
6.1.4.17	Spare parts .....	22
6.1.4.18	Software .....	22
6.1.4.19	Internal and external supports .....	22
6.1.4.20	Materials .....	23
6.1.4.21	ATEX .....	23
6.1.5	Service Duration .....	23
6.2	Scope of Service – Pipe Design .....	23
6.2.1	Background .....	23
6.2.2	Scope description .....	24
6.2.3	Piping layout with preliminary support locations .....	24
6.2.4	Complete pipe stress analysis .....	24
6.2.5	Leak tightness requirements .....	25
6.2.6	Inputs to Supplier .....	25
6.2.7	Deliverables .....	25
6.3	Scope of Service – Support Design .....	25
6.3.1	Background .....	25
6.3.2	Scope description .....	25
6.3.3	Activity 1 - Design of piping support assemblies .....	26
6.3.4	Activity 2 - Update of Catia 3D model with support assembly designs .....	27
6.3.5	Activity 3 - Structural analyses of designed supports .....	27
6.3.6	Activity 4 - Supports structural analyses report .....	27
6.3.7	Activity 5 – Support assembly drawings .....	27
6.3.8	Activity 6 – List of supports .....	27
6.3.9	Activity 7 – BoM .....	27
6.3.10	Input .....	27
6.3.11	Deliverables .....	28
6.4	Scope of Service – BGVB Design .....	28
6.4.1	Deliverables .....	28
6.5	Scope of Service – Gas cabin Design .....	28

**SUPPLY**

6.5.1	Deliverables .....	29
6.6	Scope of Service – I&C Design .....	29
6.6.1	Deliverables .....	29
<b>7</b>	<b>SCOPE OF WORK - MANUFACTURING.....</b>	<b>30</b>
7.1	Scope description and requirements .....	30
7.2	Input .....	30
7.3	Deliverables .....	30
<b>8</b>	<b>SCOPE OF WORK – INSTALLATION AND CONSTRUCTION.....</b>	<b>31</b>
8.1	Scope description and requirements .....	31
8.2	Input .....	31
8.3	Deliverables .....	31
<b>9</b>	<b>SCOPE OF WORK – POST DELIVERY SERVICES DURATION .....</b>	<b>31</b>
<b>10</b>	<b>LOCATION FOR SCOPE OF WORK EXECUTION .....</b>	<b>32</b>
<b>11</b>	<b>IO DOCUMENTS &amp; IO FREE ISSUE ITEMS.....</b>	<b>32</b>
<b>12</b>	<b>DELIVERABLES AND SCHEDULE MILESTONES .....</b>	<b>33</b>
12.1.1	Schedule for delivery .....	33
12.1.2	List of deliverable documentation.....	34
<b>13</b>	<b>QUALITY ASSURANCE REQUIREMENTS.....</b>	<b>34</b>
<b>14</b>	<b>SAFETY REQUIREMENTS.....</b>	<b>34</b>
14.1	Nuclear class Safety .....	34
14.2	Seismic class .....	35
<b>15</b>	<b>SPECIAL MANAGEMENT REQUIREMENTS .....</b>	<b>35</b>
15.1	Contract Gates.....	35
15.2	CAD design requirements.....	35
<b>16</b>	<b>APPENDICES .....</b>	<b>35</b>
16.1	Appendix 1 – Phases and Milestones.....	36
16.2	Appendix 2 – Minimum required HP and PIA for the contract.....	37
16.3	Appendix 3 – Contractor deliverables for each phase and milestone .....	39
16.3.1	Expected list of deliverables for the Boronization FDR .....	39
16.3.2	Expected list of deliverables for the Boronization MRR.....	40
16.3.3	Expected list of deliverables of the I&C design .....	40
16.3.4	Expected list of deliverables for the Xenon gas supply FDR .....	41
16.3.5	Expected list of deliverables for the Xenon gas supply MRR .....	41
16.4	Appendix 4 – Installation and Construction Work Packages .....	42

## SUPPLY

### 1 Preamble

This Technical Specification is to be read in combination with the General Management Specification for Service and Supply (GM3S) – Ref [1] that constitutes a full part of the technical requirements.

In case of conflict, the content of the Technical Specification supersedes the content of Ref [1].

### 2 Purpose

The purpose of this Technical Specification document to define the scope, responsibilities and requirements relevant to the implementation of the ITER Boronization system and XRCS gas supply system.

The change of the ITER machine with a first wall armour from beryllium to tungsten triggered the need for boronization which aims at coating the surfaces with boron species by injecting a mixture of diborane gas with helium from numerous locations in the ITER Vacuum Vessel and performing a thin film deposition via glow discharge.

The XRCS system on the ITER machine requires the supply of Xenon gas from a single location. This Xenon gas supply system is much smaller in scope than the Boronization system.

This document contains the technical specification for the design and analyses of the systems, and for the manufacturing and optional installation of the ex-vessel components.

### 3 Acronyms & Definitions

#### 3.1 Acronyms

The following acronyms are the main one relevant to this document.

Abbreviation	Description
BGVB	Boronization Gas Valve Box
BoM	Bill of Material
CDR	Conceptual Design Review
CRO	Contract Responsible Officer
DIR	Design Integration Review
EP	Embedded Plate
EWP	Engineering Work Package
FDR	Final Design Review
GM3S	General Management Specification for Service and Supply
HP	Hold Point
ICD	Interface Control Document
IDM	ITER Document Management system
IO	ITER Organization

## SUPPLY

IS	Interface Sheet
MIP	Manufacturing Inspection Plan
MRR	Manufacturing Readiness Review
MTO	Material Take Off
PDR	Preliminary Design Review
PED	Pressure Equipment Directive
PFP	Passive Fire Protection
PIA	Protection Important Activity
PIC	Protection Important Component
PRO	Procurement Responsible Officer
RH	Remote Handling
SIC	Safety Important Component
PIC	Protection Important Component
XRCS	X-Ray Core Spectroscopy

[ITER Abbreviations \(2MU6W5\)](#)

### 3.2 Definitions

The following definitions are the main one relevant to this document.

Word	Description
<b>CBT tool</b>	The validation of the EP capacity is performed using the Calculation Book Tool (CBT). The validation is performed by using CBT Excel spreadsheets (see <a href="#">Calculation Book Tool Validation - Standard and Special Embedded Plates Interaction Diagram Check - ENG_04_QQ_0D0012_CW (4HMAAT)</a> and attached files)
<b>Common Support</b>	A common support is a new metallic structure replacing several existing single supports from various PBS
<b>Contractor</b>	shall mean an economic operator who have signed the Contract in which this document is referenced
<b>May</b>	not a requirement or constraint, included as a suggestion or recommendation to the implementing contractor
<b>Shall</b>	mandatory requirement or rigid constraint
<b>Shared Support</b>	A metallic supporting structure with attachment of another PBS's components
<b>Should</b>	optional requirement or flexible constraint

## SUPPLY

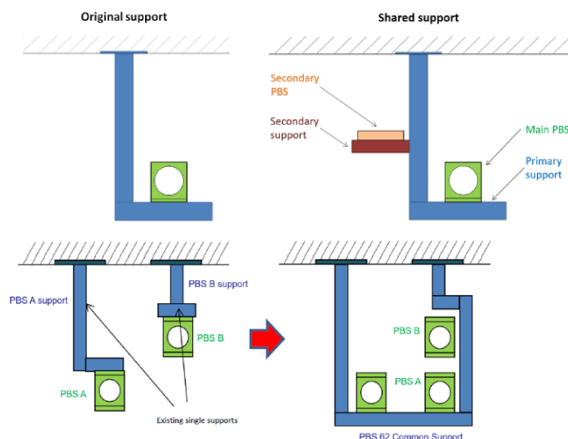


Image 1 Shared Support Common support definition

## 4 Applicable Documents & Codes and standards

### 4.1 Diagram

The SRDs and PIDs shall be consistent with the design and shall be implemented by IO [5] [6]. Examples are referenced in this document.

### 4.2 Applicable Documents

This is the responsibility of the Contractor to identify and request for any documents that would not have been transmitted by IO, including the below list of reference documents.

This Technical Specification takes precedence over the referenced documents. In case of conflicting information, this is the responsibility of the Contractor to seek clarification from IO.

Upon notification of any revision of the applicable document transmitted officially to the Contractor, the Contractor shall advise within 4 weeks of any impact on the execution of the contract. Without any response after this period, no impact will be considered.

Ref	Title	IDM Doc ID	Version
1	General Management Specification for Service and Supply (GM3S)	<a href="#">82MXQK</a>	1.4
2	Boronization SRD	<a href="#">AQPUC7</a>	1.0
3	Boronization Defined Requirements	<a href="#">ADKKPM</a>	1.1
4	List of ICDs	<a href="#">AM634V</a>	1.0
5	CDR level - PFD	<a href="#">DJGN6T</a>	1.0
6	CDR level - P&ID	<a href="#">9BJL49</a>	1.1
7	Boronization SDD	<a href="#">DEWYGP</a>	1.0
8	In vessel Load Specification	<a href="#">CH78LX</a>	1.2
9	Ex vessel Load Specification	<a href="#">CQ5VB8</a>	1.0

## SUPPLY

10	3D models references	Supplied separately by IO	
11	PCR-001624 - Baseline 2024 - Scenario B - Addition of the Boronization system (daughter of PCR-001600)	<a href="#">PCR-001624</a>	
12	HAZOP Level 1	<a href="#">5CHF47</a>	1.0
13	Mass balance and sizing calculation	<a href="#">9BKB8Z</a>	1.0
14	IC/STAC-Overview Boronization system	<a href="#">9EGV4Y</a>	1.1
15	Technical Uncertainties Register	<a href="#">9BJPSV</a>	1.1
16	CDR Input data package	<a href="#">AF9DSX</a>	1.1
17	Pilot piping stress analyses	<a href="#">DUPTR4</a>	1.0
18	Design Review Procedure	<a href="#">2832CF</a>	7.0
19	ITER System Design Process (SDP) Working Instruction	<a href="#">4CK4MT</a>	4.1
20	Template for SDR Input Data Package	<a href="#">TWW7AY</a>	4.1
21	Diagram - Electrical (single line diagram) of ITER GIS	<a href="#">3CQZDC</a>	1.9
22	Description Document of ITER GIS I&C (including Functional Analysis, Machine State, Cubicles, Conventional, Interlock, and Safety)	<a href="#">3CR48X</a>	1.7
23	I&C Signal List of ITER GIS	<a href="#">3Z3XJ4</a>	2.1
24	I&C Data List of ITER GIS	<a href="#">3Z44FP</a>	2.2
25	EWP Toolbox	<a href="#">EWP Toolbox link</a>	
26	CBT tool	<a href="#">4HMAAT</a>	3.0
27	ITER Vacuum Handbook	<a href="#">2EZ9UM</a>	2.5
28	Décret n° 2015-799 du 1er juillet 2015 relatif aux produits et équipements à risques - EN (U5TKD4)	<a href="#">U5TKD4</a>	1.0
29	EDH Part 1: Introduction (2F7HD2)	<a href="#">2F7HD2</a>	1.4
30	Plant Control Design Handbook (27LH2V)	<a href="#">27LH2V</a>	7.1
31	Instructions for Structural Analyses	<a href="#">35BVV3</a>	4.1
32	Instructions for Seismic Analyses	<a href="#">VT29D6</a>	2.0
33	Classifications of the Boronization system	<a href="#">DPNHKQ</a>	1.0
34	Input – Preliminary supports list	Supplied separately by IO	
35	Input – Preliminary embedded plate list	Supplied separately by IO	
36	Input – Preliminary models	Supplied separately by IO	
37	Input – floor response spectra	Supplied separately by	



## SUPPLY

		IO	
38	Input – preliminary analyses – geometry, 3D models, BoM Template	Supplied separately by IO	
39	Chemical composition and impurity requirements for materials	<a href="#">REYV5V</a>	3.0
40	Order dated 7 February 2012 relating to the general technical regulations applicable to INB.	<a href="#">7M2YKF</a>	1.7
41	List of ITER-INB Protections Important Activities	<a href="#">PSTTZL</a>	2.2
42	Working Instruction for Manufacturing Readiness Review (44SZYP)	<a href="#">44SZYP</a>	5.1
43	Procedure for management of Nonconformities	<a href="#">22F53X</a>	8.2
44	Procedure for the management of Deviation Request	<a href="#">2LZJHB</a>	7.3
45	Procedure for Labelling on Physical Items	<a href="#">VYJ7U2</a>	1.3
46	Working Instruction for the Delivery Readiness Review	<a href="#">X3NEGB</a>	3.1
47	Release Note Template	<a href="#">QVEKNQ</a>	3.1
48	Delivery Report Template	<a href="#">WZPYVZ</a>	3.1
49	Package & Packing List Template	<a href="#">XBZLNG</a>	1.1
50	ATEX risk assessment of PBS18.BG	<a href="#">E4TEBX</a>	1.1
51	CAD Supplier Package	<a href="#">5HHVT9</a>	
52	CAD Manual	<a href="#">29FVC2</a>	
53	Shared Supports Management Working Instruction	<a href="#">XQK5MR</a>	4.1
54	ITER RAMI Analysis Programme	<a href="#">28WBXD</a>	4.6
55	Check list for TDFC Manufacturing Drawing produced at IO	<a href="#">7MXHTR</a>	3.0
56	CATIA BOM Macro enhancements	<a href="#">XB8F7G</a>	5.1
57	Independent Peer Review Checklist	<a href="#">VQVFEN</a>	1.0
58	Technical Checker Checklist for Structural Analysis	<a href="#">TK33SU</a>	2.0
59	Safety Analysis for Explosion from Diborane Cabinet	<a href="#">APNQJK</a>	2.0
60	Template for Construction Support Tagged Item Lis	<a href="#">2CSXHN</a>	3.1
61	Quality Requirements for IO Performers	<a href="#">22MFG4</a>	6.3

**SUPPLY****4.3 Applicable Codes and Standards**

This is the responsibility of the Contractor to procure the relevant Codes and Standards applicable to that scope of work.

Ref	Title	Doc Ref.	Version
	Ex-vessel piping design ASME B31.3 M 2020		
	In-vessel piping design RCC-MR 2007		
	Supports design EUROCODE STANDARD EN1993 Eurocode 3 en Eurocode 8		
	Pipe bending PFI Standard ES-24 (Reaffirmed - September 2010) PIPE BENDING METHODS, TOLERANCES, PROCESS AND MATERIAL REQUIREMENTS		

## SUPPLY


## 5 System Overview

**Boronization Process Description** The boronization process consists of forming a thin amorphous layer of boron species on plasma-facing surfaces by injecting a mixture of diborane gas with helium and performing a glow discharge process. As the boron layer is removed by plasma operation, periodic recoating is required. At ITER it is envisaged to perform boronization at a maximum frequency of every two weeks. To introduce this new Boronization function at ITER, a process and mechanical design has been prepared including modelling, option studies, development of operating steps, control schemes, sizing calculations and routing/layout studies. A number of changes are required to perform the boronization process.

The major changes are listed below:

- Installation of new Glow Discharge Cleaning electrodes to four ports with associated services (cabling, power supply cubicles and cooling water) [11] (*out of scope of this document*)
- Installation of 21 new gas injection lines (including in vessel distribution lines) with safety isolation valves, gas valve boxes, control equipment and supply manifolds with building wall penetrations (*Within the scope of this document*)
- Installation of a new gas cabin to house the supply cylinder of diborane (*Within the scope of this document*)
- Introduction of a new diborane destruction unit (*out of scope of this document*)

Technical overview of system is available in STAC report[14]. Technical uncertainties are recorded [15].

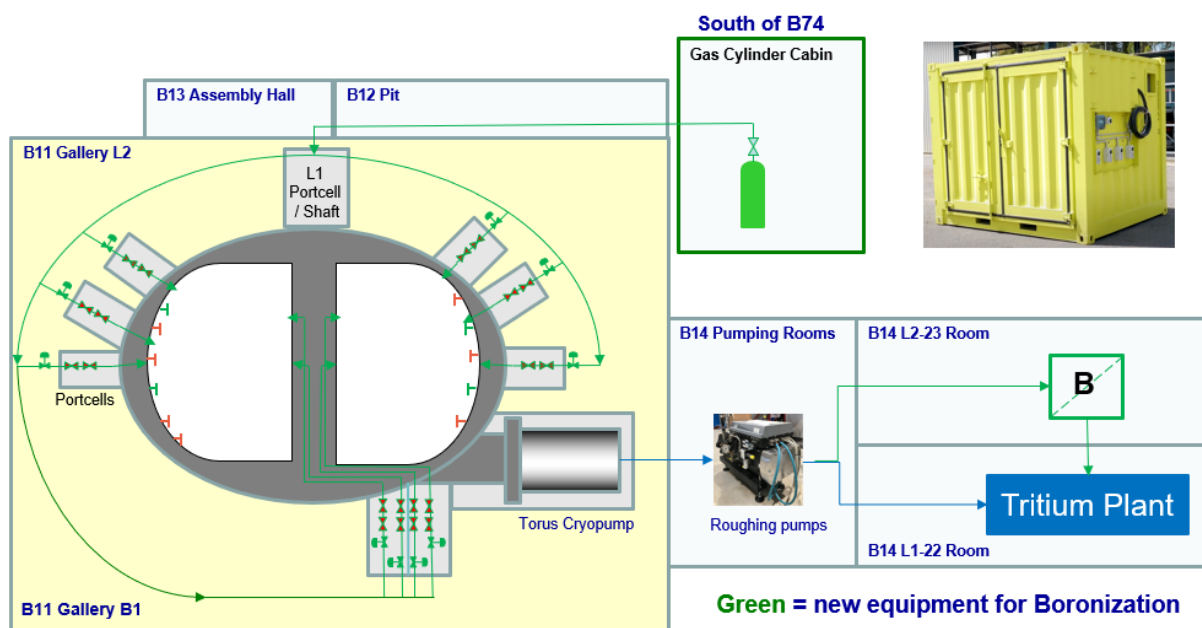

## SUPPLY

### 5.1 System component classifications

From [33].

#### 5.1.1 Boronization Gas Cabin

Boronization Gas Cabin

	Quality class	Safety class	Seismic class	Vacuum class	PED class	ESPN	Tritium class
Diborane confining components within Gas Cabin	QC-1	SR	SC1 (S)	N/A	No Category	No Category	N/A
Gas Cabin itself	QC-2	SR	SC1(S)	N/A	No Category	No Category	N/A

#### 5.1.2 Boronization Piping Network

The Boronization Gas Supply Network provides Diborane in a carrier gas of Helium at subatmospheric pressure.

BG Piping Network

	Quality class	Safety class	Seismic class	Vacuum class	PED class	ESPN	Tritium class
Internal pipe	QC-1	PIC-SIC 2	SC1(S)	N/A	PED N/A	N/A	N/A
External pipe	QC-2	PIC-SIC 2	SC1(S)	N/A	PED N/A	N/A	N/A
Supports	QC-2	PIC-SIC 2	SC1(S)	N/A	PED N/A	N/A	N/A
Penetration to enter Tokamak Complex	QC-1	PIC-SIC 1HCC	SC1(S)	N/A	PED N/A	N/A	N/A

## SUPPLY

### 5.1.3 Boronization Gas Valve Boxes and Vacuum Extensions


	Quality class	Safety class	Seismic class	Vacuum class	PED class	ESPN	Tritium class
BGVB External Barrier	QC-2	PIC/ SIC-2	SC1(S)	VQC-N/A	PED N/A	N/A	N/A
BGVB Internal gas confining components	QC-2	PIC/ SIC-2	SC1(S)	VQC-N/A	PED N/A	N/A	TC-1A
Vacuum extension	QC-1	PIC/ SIC-1	SC1(S)	VQC-1A	PED N/A	N/A	TC-1A

Boronization Gas Valve Boxes and Vacuum Extensions

## 5.2 Contract Gates


In addition to the contract gates specified in ref [1], A contract gate shall exist for design implementation formalising the CAD strategy, 2D drawing format and analysis strategy.

## 6 Scope of Work – Design

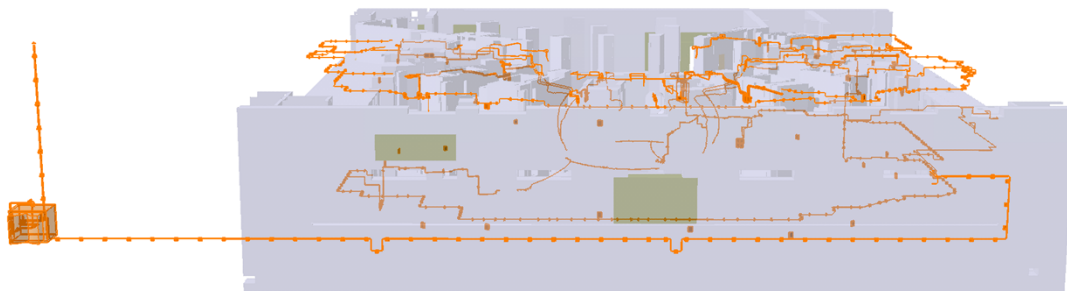




More than a kilometre of gas injection lines will be required for the boronization system. Above, the preliminary design of the proposed route through the lower level of the tokamak building with the gas lines in orange.

## SUPPLY

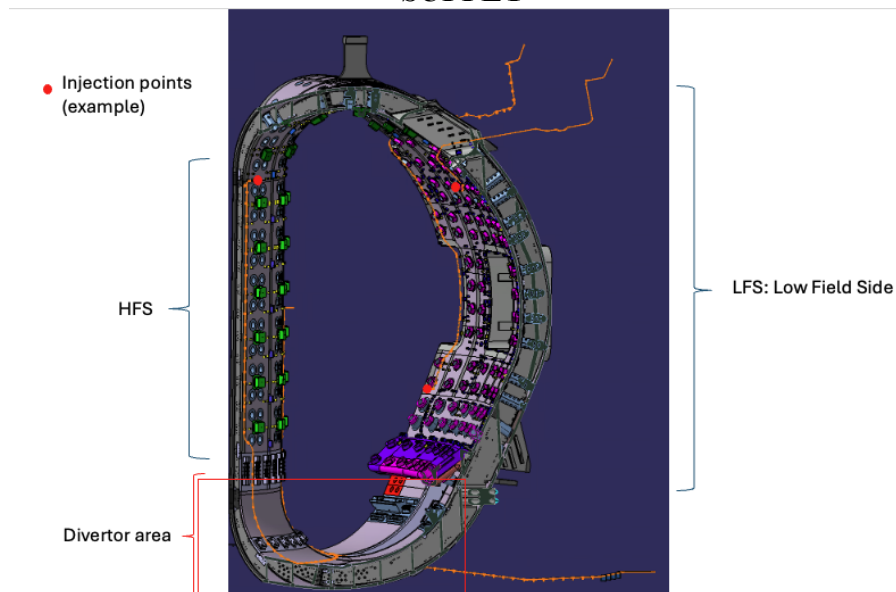



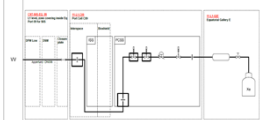


21 gas injection points will be added to the inside of the tokamak for the boronization system.


This section defines the design scope of work and its requirements, in addition to the contract execution requirement as defined in Ref [1].

No.	Design package	Length (metres)	Pipe Information	Support information	Task
1	Gas cabin to B11 	~106	DN08 Sch10s in DN32 Sch10s	Post drilled, ~2-3m span	Produced detailed model in CATIA E&S workbench suitable for promotion according to ITER Design rules to allow PCF file production and Manufacturing Readiness Review
2	B11 gallery B1 	~180	DN08 Sch10s in DN32 Sch10s	Post drilled, Shared supports & EPs ~2-3m span	Produced detailed model in CATIA E&S workbench suitable for promotion according to ITER Design rules to allow PCF file production and Manufacturing Readiness Review
3	B11 gallery L1 	~66	DN08 Sch10s in DN32 Sch10s	Post drilled, Shared supports & EPs ~2-3m span	Produced detailed model in CATIA E&S workbench suitable for promotion according to ITER Design rules to allow PCF file production

## SUPPLY

					and Manufacturing Readiness Review
4	B11 gallery L2 	~235	DN08 Sch10s in DN32 Sch10s	Post drilled, Shared supports &EPs ~2-3m span	Produced detailed model in CATIA E&S workbench suitable for promotion according to ITER Design rules to allow PCF file production and Manufacturing Readiness Review
5	B1 PC 	~222	DN08 Sch10s in DN32 Sch10s	Post drilled, Shared supports &EPs ~2-3m span	Produced detailed model in CATIA E&S workbench suitable for promotion according to ITER Design rules to allow PCF file production and Manufacturing Readiness Review
4	L2 PC 	~188	DN08 Sch10s in DN32 Sch10s	Post drilled, Shared supports &EPs ~2-3m span	Produced detailed model in CATIA E&S workbench suitable for promotion according to ITER Design rules to allow PCF file production and Manufacturing Readiness Review
5	In-vessel 	~377	DN08 Sch10s	Supports every ~1- 1.5m	Design is now completed and approved. Manufacture of supports is required to be implemented by supplier.
6	Xenon XRCS gas supply system 	~30 metres	TBC	Supports every ~1- 1.5m	Produced detailed model in CATIA E&S workbench suitable for promotion according to ITER Design rules to allow PCF file production and Manufacturing Readiness Review
7	Gas cabin	N/A	N/A	N/A	Gas cabin information in will be provided to Supplier by IO. Supplier shall

**SUPPLY**

					Integrate, procure and deliver to IO with optional installation. Exhaust stack of Gas Cabin shall be 5m tall and attached to roof of cabin.
--	---	--	--	--	---

MRR shall occur according to ref [42]

The Scope shall best estimated in cost by supplier with a rework cost per metre in the event of later change due to integration re-routing. The rework cost per metre shall include design and analysis update. The rework costs can different values; for example, type 1 significant change require design and pipe stress analysis update, type 2 simple change requiring only minor pipe stress analysis update, Type 3 is support design and support calculation update only etc

## 6.1 Scope overview and requirements

### 6.1.1 Overview

The scope is to provide the detailed design and analyses for the boronization system. It starts by using the conceptual design data and the system requirements (input data provided by the IO) and ends with the completion of the final design phase and the closure of all the chits.

A general description of the boronization system is provided in [16].

It is planned to not have a PDR and the design shall be brought to a FDR level directly. A combined PDR/FDR is hence foreseen with a design and deliverables meeting the FDR requirements.

The detailed design scope is as follows:

- A. Develop detailed and complete design and analyses for the boronization and XRCS Xenon gas supply system
  - Perform the engineering design
  - Perform needed analyses for the ex-vessel pipe network piping structural analyses, thermal analyses, and piping support structural analyses
  - Demonstrate consistency of the design with all its technical interfaces[4]
- B. Develop 3D CM and DM models
  - Develop the models to represent the complete design
  - Resolve integration, clash issues during design development
  - Demonstrate consistency of the models against the P&ID
  - Finalize the models post FDR (as needed) to close any remaining design issues
- C. Support preparation of the DIR and resolutions of the post meeting actions
- D. Resolve and close all the CDR chits (together with IO)
- E. Prepare and develop all the required deliverables for the FDR (see Appendix 3)
- F. Prepare and organize the FDR meeting
- G. Resolve and close all the FDR chits (together with IO)
- H. Prepare and develop all the required deliverables, BoM, drawings, installation technical specifications for the EWP
- I. Develop the schedule of activities needed to execute the scope of work



## SUPPLY

## SUPPLY

### *6.1.2 Design requirements*

#### **6.1.2.1 General**

The requirements to be met by the System are defined in the SRD [2]. The SRD is complemented by a series of specific applicable documents which contain detailed requirements to be met during the design of the system such as:

- Management of CAD Work and CAD Data [51] [52] [56]
- In-vessel and Ex-vessel Load Specifications [8,9]
- Electrical Design Handbook [29]
- Vacuum Design Handbook [27]
- Plant Control Design Handbook [30]
- Quality Requirements for IO Performers [61]

#### **6.1.2.2 Licencing**


The French Order [40] concerning Basic Nuclear Installation design, construction and operation is applicable to the PIC components of the Boronization system.

SUPPLY

6.1.3 Safety Requirements

The design shall be compatible with the listed required in list of defined requirements for the boronization system [3]

The responsibility of propagating and implementing the requirements is described after each one. The Identifiers [IO] and [Supplier] are used to indicated whether the responsibility is a joint responsibility of both the IO and Supplier simply a responsibility of the IO.

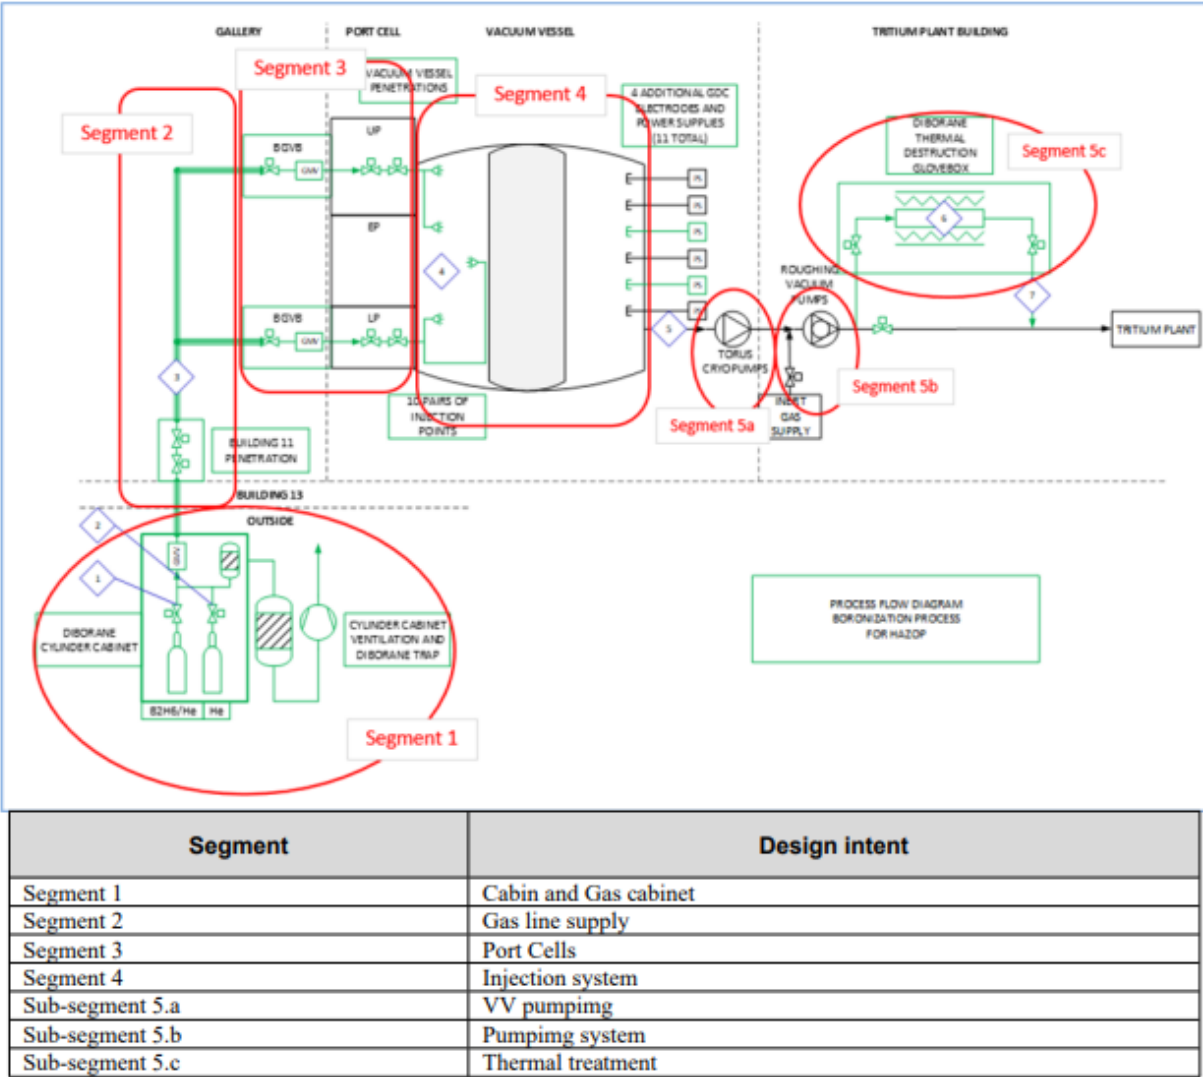

Sub segments 5a,5b and 5c in the image above are out of scope of this document.

Segment 1 – Cylinder cabined / outdoor area

Generic:

[RQ-1] [DRQ] Cooling of cabin with alarm control shall be implemented in order to avoid diborane decomposition. [IO]

[RQ-2] [DRQ] Forced ventilation of the cabin shall be implemented, discharging to atmosphere via a diborane chemical trap. [IO] [Supplier]

**SUPPLY**

[RQ-3] [DRQ] Diborane detection shall be implemented in the cabin and gas cabinet. [IO]  
[Supplier]

[RQ-4] [DRQ] The current safety assessment is based on the assumption that the cylinder of diborane will be fully emptied without site storage. If it is expected to keep a full cylinder on site, the current safety assessment shall be updated to demonstrate that there is no additional safety risk. [IO]

Fire:

[RQ-5] [DRQ] The cabin shall be fire resistant with fire rating walls of 2 h. [IO] [Supplier]

[RQ-6] [DRQ] The fire loads inside the cabin shall be limited. [IO] [Supplier]

[RQ-7] [DRQ] The installation shall be equipped with fire-fighting means appropriate to the risks and in accordance with the standards in force. [IO]

Explosion:

[RQ-8] [DRQ] The risk of diborane cylinder explosion may be due to diborane decomposition. To avoid this risk, the molar concentration of diborane in the cylinder shall be limited to 10%. [IO] [Supplier]

[RQ-9] [DRQ] All equipment of cabin shall be ATEX rated. [IO] [Supplier]

[RQ-10] [DRQ] In case of explosion inside the cabin the overpressure wave must be acceptable for buildings and PICs in the vicinity (less than 50 mbar). The current identified targets are B74, B75, B13, B11, B44, B46 and area 53 (cryogenic tanks). [IO]

[RQ-11] [DRQ] If required by overpressure wave study, a blast wall shall be implemented. [IO]

[RQ-12] [DRQ] Periodic inspections of the cabin shall be carried out. [IO]

External hazards

[RQ-13] [DRQ] Missile effects, external fire effects, external flooding and external explosion effects from other buildings to cabin shall be assessed [IO]

[RQ-14] [DRQ] Impact of seismic event on the cabin shall be assessed. The seismic design of the cabin and its equipment shall be such that acceptable impact on nearby buildings and PICs can be demonstrated. [IO] [Supplier]

[RQ-15] [DRQ] The route of the truck carrying diborane cylinder must be assessed to avoid as much as possible crossing sensitive IO buildings. Transport route of bottle up to cabin location shall take into account potential impact on PIC targets, for example due to explosion of bottle. [IO]

[RQ-16] [DRQ] Safety bollards shall be put around the cabin to avoid vehicle collisions. [IO]

Occupational health and safety:

[RQ-17] The respiratory protection equipment Self Contained Breathing Apparatus must be used during cylinder change operations. [IO]

[RQ-18] A restriction area around the cabin must be defined and applied for diborane cylinder change operation. [IO]

[RQ-19] When entering inside the cabin, operators must wear portative diborane detectors. [IO]

[RQ-20] The risk of anoxia inside the cabin shall be assessed due to a potential default of nitrogen or helium equipment. [IO]

[RQ-21] Operators making cylinder changes shall be trained to ensure they will follow all the safety requirements and also to avoid as much as possible human errors during

## SUPPLY

cylinder handling and connections [IO]

### Segment 2 – Diborane distribution in gallery

Global/explosion:

[RQ-22] [DRQ] Provisions shall be taken to limit flow rate flowing from the gas storage area in order to minimize the flammability and explosion risk in the gallery. [IO]

[RQ-23] [DRQ] Double-containment (lines and components connected to such lines) shall be required for diborane distribution in gallery. [IO] [Supplier]

[RQ-24] [DRQ] Monitoring of the interspace of double-contained piping and equipment located in gallery shall be provided. [IO]

[RQ-25] [DRQ] Provisions shall be taken to minimize impact of co-activities performed in the gallery during the boronization process. [IO]

Penetrations:

[RQ-26] [DRQ] Last confinement isolation shall be provided for penetration of piping crossing the external wall of the tokamak complex. [IO] [Supplier]

[RQ-27] [DRQ] The penetration of the boronization system from gallery to port cell shall reconstitute the barrier properties [PR198]. [IO]

[RQ-28] [DRQ] The piping connected to the vacuum vessel shall be equipped with redundant isolation devices. [IO] [Supplier]

### Segment 3 – Diborane distribution in port cell

**Global:**

[RQ-29] [DRQ] Provisions shall be taken to limit flow rate flowing from the gas storage area in order to minimize the flammability and explosion risk in the port cell. [IO]

[RQ-30] [DRQ] Access to port cell during boronization operation shall be forbidden. [IO]

Explosion:

[RQ-31] [DRQ] Double-containment (lines and components connected to such lines) is recommended. In case of not having double-containment, provisions to limit inventory in case of pipe failure/leak (detection/isolation) shall be implemented. Safety classification of components shall consider the provisions credited to manage such explosion risk and OHS hazard. [IO]

[RQ-32] [DRQ] Diborane detectors inside the port cell or at the exhaust line of DS shall be implemented. The response time must be assessed. [IO]

### Segment 4 – VV

[RQ-37] [DRQ] Diborane explosion inside the pump shall not challenge pump integrity criteria. Cryopump shall be regenerated if inventory limit is achieved. [IO]

[RQ-38] [DRQ] Means for controlling the inventory of diborane on cryopump shall be defined and implemented. [IO]

## SUPPLY

### 6.1.4 Design - Analyses

- Ex-vessel pipe distribution system, its supports, its spacers, including BGVB and Gas cabin shall be analyzed and designed with full justification and demonstration.
- An assessment of the worst case loading conditions, and the frequency of the worst case loading conditions shall be made to determine whether fatigue analysis is required, as set out in the SRD and LS [2, 8 & 9].
- The contractor shall comply with the requirements of ITER guidelines for Structural Analyses [33]
- The analyses shall be performed to meet all the loads and loads combination of the Load Specifications. Iterations is foreseen to achieve the final design, to achieve design optimization and to cope with clashes, limited space, pipe configuration, its support, its internal spacers, EP failures and interfacing loads when attached to other components supports.
- Internal spacers shall be designed, analyzed and qualified to meet the loads.
- PFP shall be taken into account since it brings additional loads.
  - o Analysis checklists shall be used [57] [58]
- Interface with VV feedthrough shall be considered, designed and analysed.
- For some locations, supports are attached on the concrete wall using a plate attached to the wall using short HST stud anchor bolts from Hilti (50mm maximum depth inside the concrete). Design and analyses shall be considered as such for the design of this kind of supports.
- Mass balance and sizing calculation is available as in input document [13]

### 6.1.5 Design Implementation

#### 6.1.5.1 Design – Mechanical piping system

The Boronization System shall be designed to retain its integrity during normal and all combinations of abnormal events, as set out in the SRD and Load Specifications [2, 8 & 9].

The EP capacity shall be verified and confirmed using the CBT tool [26].

The Boronization supports loads shall be provided to the common/shared support owner using the proposed IO template [57].

#### 6.1.5.2 Design – Mechanical Gas cabin

The design shall be resilient to the calculated explosion energy[59]. The design shall incorporate fire safety provisions- as recommended by the Fire risk analysis -see 6.5. The design of the gas cabin shall be leaktight to ***better than 0.245volume/day with a 300Pa delta P. The gas cabin shall be demonstrated compatible with and robust to the Explosion hazard Case 1: Diborane in Helium 6.1.1 Equivalent mass of TNT [63]. The Design shall be compatible with the other requires described in[63].*** The IO shall provide the gas cabin part number and the Supplier shall be responsible for integration and supply of the gas cabin.

#### 6.1.5.3 Design -Mechanical Boronization gas valve boxes

The gas valve boxes shall be doubly confined with an air equivalent overall BGVB secondary confinement leak tightness is **1e-5Pam<sup>3</sup>/s**. The internal confinement barrier shall have a leak tightness of leak tightness is **1e-10Pam<sup>3</sup>/s**. The connections of the internal barrier shall be welded as a first choice and where a dismountable flanges connection is required Swagelok VCR connections with locking mechanism shall be employed. The GVB shall have a dismountable cover allowing maintenance. The sealing o-ring of the dismountable cover shall be EPDM. The vacuum vessel isolation valves that exist between the BGVBs and the Vacuum vessel shall be

## SUPPLY

the responsibility of the IO to procure. They shall be of the type VAT 48124-RE24-ARG1 with a DN16 Weldneck interface. <https://www.vatgroup.com/series/uhv-all-metal-gate-valve>. The IO shall provide a preliminary design of the BGVB with 3D and part numbers of the internal components. (Mass Flow Controllers, pressure sensors, valves etc)

### **6.1.5.4 Design - Constructability**

The constructability of the piping, its support and spacers design shall be considered and demonstrated.

### **6.1.5.5 Design - Performance**

The contractor shall confirm and update accordingly the Boronization GVB internal components layout and confirm that the internal components meet the design and performance requirements.

### **6.1.5.6 Design - Seismic**

The design shall include provisions to minimize the potential of earthquakes to challenge confinement systems, as set out in the SRD and LS [2, 8 & 9].

### **6.1.5.7 Design - RAMI**

#### **Design – Implementation**

The Boronization System shall be designed to be a highly reliable, efficient and a safe device. In order to achieve this, RAMI Analysis shall be performed in accordance with the ITER RAMI Analysis Program [57] to ensure the optimum system design and appropriate operation, testing and maintenance programs, as set out in the SRD [2]. The Reliability Block Diagrams shall provide availability estimate.

### **6.1.5.8 Design - Environmental conditions**

The IO is responsible to provide the environmental parameters of the Boronization System, especially for sensitive items, like the magnetic field and the temperature in each room as part of the engineering design package.

### **6.1.5.9 Design - HAZOP**

The IO shall perform a formal HAZOP to consider the hazard and risks associated with the Boronization System design and to identify safeguard to be implemented in the system and to be able to identify any show stopper or important issue. A preliminary HAZOP Level 1 has been conducted for the CDR [12].

### **6.1.5.10 Design - Cubicles**

The cubicles type, quantities, internal components list, and locations shall be defined and shall be consistent with the already approved GIS I&C design.

### **6.1.5.11 Design - Deliverables**

The deliverables to be completed for the design phase are listed in Appendix 3.

The contractor shall prepare all the deliverables, diagrams and drawings listed at least 2 months prior to the design review date to allow for enough time for the review and acceptance in IDM. New versions of each deliverable are foreseen to answer comments/feedbacks from the reviewers.

Each deliverable shall be accepted / approved at least 2 weeks prior to the design review to allow enough time for the panel members to review the documents.

## SUPPLY

### **6.1.5.12 CM and DM models**

The contractor shall assess and demonstrate consistency between CM and DM according to [55].

The contractor shall assess and demonstrate consistency between P&ID and DM

### **6.1.5.13 Design Review and Design Integration Review**

The contractor shall support the preparation of the DIR slides (together with the IO) and support the resolution of the post meeting actions.

The contractor shall prepare and organize the FDR as per the Design Review Procedure [19].

The contractor shall prepare / support the preparation of the needed PowerPoint presentations for the FDR, and it shall be uploaded in IDM at least 1 week before the design review meeting.

The contractor shall follow-up with presenters to make sure that the presentations are all delivered on time for the design review meeting.

The contractor shall support the preparation of the design review notification, agenda, chit management and meeting minutes.

The contractor shall support the design review chair as per request, before, during and after the design review meeting.

### **6.1.5.14 Chit management and closure**

The contractor shall support IO for the closure of the chits. A chit summary table to track the chit closure progress shall be prepared.

### **6.1.5.15 Standardization**

Standard commercially available components, equipment, materials, and processes shall be used wherever possible. Specific components of sub-systems procured under this contract shall preferably be chosen from ITER standards catalogues. There are however also mandatory catalogued as decided by project policies and any selection deviating from the mandatory catalogue parts, such as the PLCs, shall be subject to a Deviation Request. [44]

The following catalogues are available / in phase of implementation at the ITER project:

- Standardized interfaces for all ITER plant system instrumentation and control can be found in the Plant Control Design Handbook [30]
- A catalogue for standard components for vacuum, Appendix 20 Standard Components to the Vacuum Handbook [27].

Where possible components, equipment, materials, and processes should be standardized across the system and be available from more than one source.

### **6.1.5.16 Operation and maintenance**

Operation and Maintainability requirements are defined in the SRD [2] and includes special tools, spare parts and consumables.

### **6.1.5.17 Spare parts**

Components procurement shall include spare parts as follows:

- 1- Pipes, Calculate length for installation then add 20% extra by length
- 2- Off-the-shelf items, short lead time (<3months), 10% extra
- 3- Specific items, long lead time (>3months), 20% extra

### **6.1.5.18 Software**

Piping stress analyses shall be conducted using Caesar II.



## SUPPLY

Support structural analyses shall be conducted using GT Strudl.

### **6.1.5.19 Internal and external supports**

The FDR design shall keep, as much as possible, the predefined locations of all the supports (internal and primary/secondary supports) as well as the predefined EP or attachments to a common/shared supports.

The support's location and quantities are partly available in the 3D models and via the estimates of pipe span within this document

### **6.1.5.20 Materials**

- Materials for structural metallic components such as pipes, supports, flanges, valves ... shall be Austenitic Stainless Steel
- To minimize activation of the materials exposed to neutron flux in ITER, the following chemical composition and impurity levels shall be (as per Material Spec of IO) [39]
- For the majority of the ex-vessel locations neutron flux is low and so derogation can be sought for the low impurity requirements.
- 3.1 Material certification according to EN 10204:2004 shall be provided to ensure compliance with impurity requirements. If compliance is not demonstrated due to missing elemental composition PMI testing shall occur and reports provided.
- Exhaustive full list of material shall be submitted to the IO for approval before any use. The Approval of the list by IO shall be identified as a PIA

### **6.1.5.21 ATEX**

ATEX assessment is completed [50].

### **6.1.6 Service Duration**

February 2026	Contract signature
February 2026	KoM
December 2026	FDR meeting
March 2027	Final design approved
May 2027 – June 2027	MRR
July 2027 – July 2028	Procurement, manufacturing, DRR and delivery
July 2028 – February 2031	Engineering support during installation

See Appendix 1, summary of key milestones

## SUPPLY

**6.2 Scope of Service – Pipe Design***6.2.1 Background*

The IO performs a preliminary pilot analysis. The Supplier produces the following:

No.	Pipe stress Analysis	Notes
1	Ex vessel	CAESAR II to be used
2	Feedthroughs	FEA analysis to be completed. ANSYS or equivalent to be used
3	Ex vessel support structural analysis	STRUDL or equivalent to be used

*6.2.2 Scope description*

The scope is to update the analyses and to perform analyses of the remaining pipe sections.

The analysis shall be performed using Caesar II software version 2019 (or earlier version, to be agreed with IO). The analysis shall be performed with the following objectives:

- To evaluate the pipe stresses to confirm compliance with the design code and the IO document ‘Allowable values and limits in Service Level C and D for ITER mechanical components’ [17].
- To determine the appropriate functions of the piping supports (e.g. Z, guide, axial stop); and to identify if any more supports are needed, or if any of the supports can be removed.
- To ensure that the loads on the pipe supports during all operating conditions are within the defined limits
- To ensure that the pipe vertical sag remains below 3mm (criteria from [17]) under sustained load conditions, and that in operating conditions pipe displacements are within the defined limits to prevent clashes with adjacent systems.

The piping and support layout could be changed if required (to be agreed with the IO).

The locations of the piping supports are already defined but could change as per the piping stress analyses. The details of the piping support locations shall be provided in the isometrics drawings. The Contractor shall determine the appropriate support functions (i.e. Z, Guide, Axial Stop, and any gaps required) at each of the support locations to ensure that the design meets the criteria for stresses, displacements and loads on supports.

Produce new pipe stress models for the missing lines.

There are a total of [TBD – Number to be finalized] sections.

All the lines shall be analyzed in a single pipe stress model.

Iterations are expected until no issues.

3D models shall be updated as per the analyses results.

## SUPPLY

### *6.2.3 Piping layout with preliminary support locations*

Complete 3D piping layout with preliminary support locations according to CAD design rules and requirements set within this document

### *6.2.4 Complete pipe stress analysis*

Complete CAESAR pipe stress analysis iterations until system is passing and optimised. Generate reports and gain approval for documentation and supporting files via IDM.

### *6.2.5 Leak tightness requirements*

Each of the pipe connections shall have a leak tightness of better than  $1\text{e-}10\text{Pam}^3/\text{s}$  with a differential pressure of 1 atmosphere.

### *6.2.6 Inputs to Supplier*

- Existing preliminary Caesar II piping models
- Existing 3D models
- Interfaces
- Material data
- SRD
- SLS (EM loads, Thermal loads ...)
- Code and standards
- EM loads for in vessel piping
- Instructions for Analyses [31] [32]

### *6.2.7 Deliverables*

The Contractor shall provide the final native files for all calculations performed including:

- Completed Caesar II model files
- Excel or mathcad files used for local stress calculations or other calculations
- Completed 3D models according to CAD rules.
- Structural integrity reports
- Pipe Stress analysis reports
- Isometrics

## **6.3 Scope of Service – Support Design**

Support scope is the supports for the pipes and BGVB.

### *6.3.1 Background*

Based on preliminary design work, there is about 1.5km of pipe with the estimated spans in *section 6 scope of work design*

In B13, B11 galleries and Port cells, pipes are attached to EP, other components supports or directly on the concrete wall or ceiling.

## SUPPLY

There are no support designs, grouping or typical defined.

### 6.3.2 *Scope description*

- The contractor shall defined support groups and typicals.
- The contractor shall perform the design for each individual support and shall perform structural analysis calculations for each of the typical support assembly designs.
- The structural analysis calculations shall cover the enveloping load cases for all of the individual supports that are represented by the typical support design. This shall ensure that each support has a valid structural analysis calculation to demonstrate the adequacy of its design.
- For the purposes of estimating the work, it shall be assumed that there will be in total up to about 1000 individual supports, and no more than 25 typical support assembly designs.
- The Piping system is a Quality Class 1 System, as defined by Quality Classification Determination (24VQES v4.3). The calculations to be performed under this scope of work are classified as Protection Important Activities (PIAs)[41]. As such the process described in “Analyses and Calculations Analyses and Calculations (22MAL7 v5.1)” is mandatory. This process covers the activities associated with planning, preparing, technical checking, reviewing issuing, and revising analyses and calculations. In particular, it is required that a Quality Plan is prepared in accordance with Procurement Requirements for Producing a Quality Plan (22MFMW v4.0) for approval by IO; and that the calculations undergo Technical Checking and Independent Peer Review as defined in “Analyses and Calculations Analyses and Calculations (22MAL7 v5.1)” Other requirements associated with performing calculations classified as PIA are detailed in “Analyses and Calculations Analyses and Calculations (22MAL7 v5.1)”.
- The task of Technical Checking is within the Contractor’s Scope. The Independent Peer Review shall be performed by IO, and is outside of the Contractor’s Scope. After completion of the calculations and the Technical Checking, the report shall be submitted for Independent Review. This is further described in Section 11.5.1, and the overall work process is shown in Figure 1 of “Analyses and Calculations Analyses and Calculations (22MAL7 v5.1)”.
- Normal iterations, performed over the course of the various activities, are considered to be within the Contractor’s scope of work.
- Further details of the activities within the Contractor’s scope of work are provided in the following sections.

### 6.3.3 *Activity 1 - Design of piping support assemblies*

The Contractor shall design the piping support assemblies based on the preliminary design concepts and according to the space available in the IO 3D model. The design of the supports shall take into account the restraint type, and the loads and displacements obtained from the piping stress analysis calculation (by others).

The Contractor shall also review and, if necessary, modify the number and the configuration of the ‘typical’ support assembly designs that are required to represent all of the individual supports. The Contractor shall propose a final list of ‘typical’ designs, which shall be used as the basis for the structural analysis calculations.

In general, the support assemblies consist of primary and secondary support components:

- The primary support is the part of the support assembly which is directly connected to the pipe (typically COTS hardware).
- The secondary support is the part of the support assembly which is directly connected to the supporting structure, and supports the primary support.

## SUPPLY

The Contractor shall perform the design of both the primary and secondary support components:

- For the primary support components, the Contractor shall select suitable COTS equipment from manufacturer's catalogues. COTS references available for the equipment selected shall be provided to IO.
- For the secondary supports, the Contractor shall select ASTM /EN standard profiles in accordance with the design code (seamless square or rectangular structural steel tubing shall be used whenever possible). The ends of all hollow sections shall be closed to avoid contamination inside the sections. All selected structural steel sections should be readily available.

The materials used in the manufacture of support assemblies shall be suitable for the operating and environmental conditions where they are located. Where support materials come into contact with the piping, they shall be of a compatible material.

Wherever possible, non-welded attachments shall be used for the primary support. Use of welded attachments to the pipe pressure boundary (lugs or similar) where required shall be at the approval of IO.

At the beginning of this activity, the contractor shall produce a Design Input Record of all the design information received from IO. This Design Input Record shall be updated periodically as required.

### *6.3.4 Activity 2 - Update of Catia 3D model with support assembly designs*

CAD shall be implemented according to ITER rules defined in this document [55].

### *6.3.5 Activity 3 - Structural analyses of designed supports*

Structural analysis shall occur according to ITER rules defined in this document

### *6.3.6 Activity 4 - Supports structural analyses report*

Structural analysis shall be implemented based upon conditions described in this document and references [31] [32]

### *6.3.7 Activity 5 – Support assembly drawings*

Support assembly drawings shall be implemented based upon conditions described in this document and reference [55]

### *6.3.8 Activity 6 – List of supports*

List of supports shall be implemented according to ITER design rules using template [60]

### *6.3.9 Activity 7 – BoM*

BOM shall be implemented according to ITER design rules using template and CATIA tools [56]

## SUPPLY

### 6.3.10 Input

IO shall make available to the Contractor at the KoM of the WP the following documents:

- Load Specification
- Support list template
- Preliminary Embedded Plates (EP) list
- Design Guidelines
- Existing P&IDs
- Existing Isometrics
- Piping Specification
- Example support drawings
- CATIA non editable format (XML, 3Dlive or 3Dvia composer file) files showing the
- Existing preliminary piping and supports integrated with other systems and into the complete building environment

### 6.3.11 Deliverables

- Design records
- Final list of typical support assembly designs
- Final 3D model updated with qualified support designs
- Final structural calculation software models after supports qualification
- Final supports drawings
- List of all the supports
- Bill of Materials
- Documentation schedule
- Software Verification and Validation dossier

## 6.4 Scope of Service – BGVB Design

shall make available to the Contractor at the KoM of the WP the following documents:

- Load Specification
- Support list template
- Preliminary Embedded Plates (EP) list
- Design Guidelines
- Existing P&IDs
- CATIA non editable format (XML, 3Dlive or 3Dvia composer file) files showing the
- Existing preliminary BGVB design integrated with other systems and into the complete building environment

### 6.4.1 Deliverables

- Design records
- Final list BGVB assembly designs
- Final 3D model according to CAD rules promoted in Enovia
- Final structural calculation software models and structural qualification report
- Final Manufacture and Installation drawings
- List of all the supports
- Bill of Materials
- Documentation schedule
- Software Verification and Validation dossier

## SUPPLY

**6.5 Scope of Service – Gas cabin Design**

Cabin and concrete

A fire risk analysis shall be conducted by the Contractor to ensure that fire-related risks are effectively identified, managed and mitigated.

The fire risk analysis shall recommend firefighting/fire protection provisions tailored to the identified fire risks and considering the limited time the diborane gas will be available inside the cabin.

The Fire Protection provisions developed during the FDR design phase shall address the unique hazards and characteristics of the Gas cabin, ensuring full compliance with European norms, French fire safety regulations, and the specific requirements of the ITER Project.

Gas Cabin Fire Risk Analysis, Gas Cabin Fire Protection Provision descriptive document and BGS Fire Load document shall be provided at the FDR and updated at the subsequent contract milestones.

IO shall make available to the Contractor at the KoM of the WP the following documents:

- Load Specification
- Design Guidelines
- Existing P&IDs
- Existing Isometrics
- Piping Specification
- CATIA non editable format (XML, 3Dlive or 3Dvia composer file) files showing the

**6.5.1 Deliverables**

- Design records
- Design Justification document
- Final 3D mode updated with qualified support designs
- Documentation schedule
- Software Verification and Validation dossier

**6.6 Scope of Service – I&C Design**

BG I&C design shall be implemented to replicate existing GIS I&C [22],[23] & [24].

IO shall make available to the Contractor at the KoM of the WP the following documents:

- Design Guidelines
- Existing P&IDs
- Existing IS, PBS 43, 44, 45, 46, 48.01, 48.02
- 

**6.6.1 Deliverables**

- Design records
- Design Justification document
- Final 3D model
- Documentation schedule
- Diagram - Electrical (single line diagram) of BG System

## SUPPLY

- Description Document of BG System (including Functional Analysis, Machine State, Cubicles, Conventional, Interlock, and Safety)
- I&C Signal List of BG System
- I&C Data List of BG System
- Diagram - Electrical (single line diagram) of Xenon XRCS Gas Supply System
- Description Document of XRCS Gas Supply System (including Functional Analysis, Machine State, Cubicles, Conventional, Interlock, and Safety)
- I&C Signal List of XRCS Gas Supply System
- I&C Data List of XRCS Gas Supply System
- Update of IS, PBS 43, 44, 45, 46, 48.01, 48.02
- 

## 7 Scope of Work - Manufacturing

### 7.1 Scope description and requirements

Taking the FDR deliverables, the manufacturing scope is as follows:

- A- Prepare material specifications and component specifications needed to select material and component suppliers
- B- Select suppliers
- C- Develop detailed and complete documentation for the MRR together with the suppliers
- D- Oversight suppliers work and ensure that it meets the requirements
- E- Oversight delivery and perform delivery inspection accordingly

### 7.2 Input

### 7.3 Deliverables

#### Piping

- Close chits which could impact manufacturing
- 3D models shall be drafted and approved / frozen stage
- material technical specifications
- pipe BoM, supports BoM including spacers and all components needed
- list of valves and components
- 2D drawings of all the supports according to [59]
- GA drawings of the pipe network
- Isometric drawings
- Manufacturing process fluids and materials (e.g. cutting fluids, cleaning solvents ...) shall be in accordance with the [Appendix 3 Materials \(27Y4QC\)](#) and [Appendix 4 Accepted Fluids \(2ELN8N\)](#)

#### I&C

- List of cubicles
- List of cables
- List of instruments
- Drawings of cubicles
- Catalogue references as needed ...

#### Others



## SUPPLY

- Detailed classifications of all sub-components
- General Technical Specifications to include manufacturing requirements such as MIP, delivery, packaging, FAT, SAT, list of deliverables, qualifications, procedures, welding requirements, cleanliness requirements, code and standards, NCR process. [45] [46] [47] [48][49]
- The Factory Acceptance Testing of the I&C systems will comply with the requirements of Plant Systems Factory Acceptance Plan for I&C systems [Plant system I&C Integration plan \(3VVU9W\)](#).

## 8 Scope of Work – Installation and Construction

### 8.1 Scope description and requirements

Taking into account design and manufacturing data, the installation and construction scope is as follows:

- A- Prepare EWP as per IO guidelines and requirements
- B- Install Boronization components as per design, integration and installation requirements

Guidelines and requirements as per EWP Tool box [25] [EWP Toolbox link](#)

### 8.2 Input

All relevant Installation documentation shall be provided by IO to supplier in support of the supplier's activities at the KOM.

### 8.3 Deliverables

Supplier shall

EWP are prepared, delivered and approved using ICP4.

## 9 Scope of Work – Post delivery services duration

Phase 1 duration is until the delivery of the parts at the IO + 6 months to address any receiving inspection issues

Phase 2 duration is phase 1 + 3 years to support and address any RFI, DR, field modifications and documentation update (e.g. supports dimensions changes, update of drawings and related documents)

## SUPPLY

### 9.1 Engineering services

Any additional services not covered in this Technical Specification shall be managed by the method described below.

The contractor shall in their offer supply the fixed hourly manpower rates of the engineering work rates used for these works. In the offer the supplier shall propose a price revision formula.

To manage such an additional service IO shall issue for the service following this process.

1. The ITER Organization shall issue and send to the Supplier a Supply Request for any additional engineering service it may require from the Supplier.
2. The Supply Request shall include the following information.
  - Scope of work
  - Technical specification
  - Required completion date
  - Deliverables
  - Deadline date for the Supply Offer submission
  - Any other information required.
3. By the deadline date described in the Supply Request, the Supplier shall submit the financial and technical Supply Offer to the ITER Organization.
4. The Supply Offer shall include the following information:
  - Compliance with the Supply Request
  - Required total manpower hours and its breakdown
5. After the review of the Supply Offer, the ITER Organization may issue and send to the Supplier a Supply Order for the service it requires from the Supplier. The Supply Orders shall be prepared and sent by two original copies.
6. The Supply Order shall include the following information.
  - Scope of work
  - Quantity
  - Unit price in EURO
  - Total amount of order in EURO
  - Required delivery timing
  - Payment plan
  - Point of contact in each Party during the implementation of the Task Order
  - Deliverables
  - Any other conditions required

## 10 Location for Scope of Work Execution

The Contractor can perform the work at their own location, but it is preferred to have key personnel at the IO for daily communication and make the progress more efficient.

## 11 IO Documents & IO Free issue items

IO shall free issue the Vacuum Vessel isolation valves to the Supplier.

## SUPPLY

## 12 Deliverables and Schedule Milestones

## 12.1.1 Schedule for delivery

Delivery need date	Description
July 2028	He/Diborane cylinder cabin
January 2029	Pipes and supports for diborane gas distribution BGVB, control and safety isolation valves I&C components

Reference ID	Description	UOM	Quantity	Delivery Time*	Comment
<i>Delivery 1</i>	He/Diborane cylinder cabin	<i>Piece</i>	<i>1</i>	July 2028	
<i>Delivery 2</i>	Pipes and supports for diborane gas distribution and XRCS gas supply system BGVBs, control and safety isolation valves I&C components for both systems	<i>Piece</i>	<i>1</i>	January 2029	

Please find hereafter the expected detailed schedule:

Schedule Milestones	Description	Is Contract Gate? (Y/N)	Expected Timing (T0+x) *
#1	FDR XRCS	Y	8 months
#2	FDR BG	Y	9 months
#3	MRR XRCS	Y	12 months
#4	MRR BG	Y	15 months
#5	DRR Gas Cabin Delivery 1 Scope	Y	22 months
#6	DRR Pipes and supports for diborane gas distribution and XRCS gas supply system BGVBs, control and safety isolation valves I&C components for both systems. Delivery 2 Scope.	Y	24 months

\* TO = KOM date.

## SUPPLY

### 12.1.2 List of deliverable documentation

The Supplier shall provide IO with the documents and data required in the application of this technical specification, the GM3S Ref [1] and any other requirement derived from the application of the contract.

You can find here below a minimum list of documentation, but not limited to, that are required within the expected timing:

Category	Document Type	Further Description	Expected Timing (T0+x) *
Design	KoM	List Appendix 3	
	Progress meeting	List Appendix 3	
	FDR	List Appendix 3	
Manufacturing	Preparation	List Appendix 3	
	MRR	List Appendix 3	
	Delivery	List Appendix 3	

(\*) T0 = Commencement Date of the contract ; X in months.

Supplier shall prepare their document schedule based on the above and using the template available in the GM3S Ref [1] appendix II ([click here to download](#)).

## 13 Quality Assurance requirements

The Quality class under this contract is described in section 5.1 of this document. [Ref 1] GM3S section 8 applies in line with the defined Quality Class. Compliance with IO procedure 22MFG4 shall be ensured.

## 14 Safety requirements

The Safety class under this contract is described in section 5.2 of this document. “The scope under this contract covers for PIC and/or PIA and/or PE/NPE components, [Ref 1] GM3S section 5.3 applies.”

### 14.1 Nuclear class Safety

The Nuclear Safety class under this contract is described in section 5.2 of this document.

## SUPPLY

### 14.2 Seismic class

The Seismic class under this contract is described in section 5.2 of this document.

## 15 Special Management requirements

State here if “Requirement for [Ref 1] GM3S section 6 applies in full ” and remove the below or “Requirement for [Ref 1] GM3S section 6 applies completed/amended with the below specific requirements:”

### 15.1 Contract Gates

In addition to the contract gates as defined in [Ref 1] section 6.1.5, the scope of work call for Contract gates as defined in section 5 of this document

.

### 15.2 CAD design requirements

This contract requires for CAD activities, [Ref 1] GM3S section 6.2.2.2 applies

## 16 Appendices

## 16.1 Appendix 1 – Phases and Milestones

Summary of key milestones

- FDR
- MRR
- Delivery
- Installation

<b>Dates</b>	<b>Milestone Description</b>
January 2026	Contract signature
January 2026	KoM
November 2026	FDR meeting
February 2026	Final design approved
April 2027 – June 2027	MRR
July 2027 – July 2028	Procurement and manufacturing
July 2028 – February 2031	Engineering support during installation and optional installation

<b>Delivery need date</b>	<b>Description</b>
July 2028	He/Diborane cylinder cabin
January 2029	Pipes and supports for diborane gas distribution BGVB, control and safety isolation valves I&C components

## 16.2 Appendix 2 – Minimum required HP and PIA for the contract

	Control Point	PIA (Y/N)	Comment
<b>Tender</b>			
Contract awarded	HP	N	
<b>Final Design</b>			
Kick-Off Meeting	HP	N	
Quality Plan approved by IO	HP	Y	
Model review	HP		
PFD review	HP		
P&ID review	HP		
HAZOP review	HP		
FDR meeting	HP	Y	
Chits closure	HP		
<b>Pre-fabrication Activities</b>			
MRR meeting	HP	Y	
Material receiving inspection	HP	Y	
Welding consumables verification	HP	Y	
Qualification of Welders and Welding Procedures	HP	Y	
Workshop cleanliness inspection	HP	N	
<b>Manufacturing Activities</b>			
Marking and Identification of pipes, supports ...	HP	N	

Cleaning of pipes, bellows, hoses, fittings	HP	N	
Welding	HP	Y	
RT tests	HP	Y	
He leak tightness of assembly	HP	Y	
Dimensional and visual inspection	HP	N	
Cleanliness inspection	HP	N	
<b>Packing and Shipping</b>			
Conditioning of the parts	HP	N	
Manufacturing Dossier	HP	Y	
Delivery documentation (CRN, packing list ...)	HP	Y	
Receiving inspection at the IO	HP	Y	



## 16.3 Appendix 3 – Contractor deliverables for each phase and milestone

### 16.3.1 Expected list of deliverables for the Boronization FDR

The FDR preparation and list of deliverables shall be proposed by the Contractor in accordance with the DR procedure [18], the SDP Working Instruction [19] and the Template for SDR Input Data Package [20]. A representative example of the Boronization System FDR List of deliverables and Activity responsibility is shown below for the purpose of supplier cost estimation.

Aspect <i>Select the main aspect to which you refer the document activities</i>	Expected Document	ICP Doc Type	FDR Maturity <i>(Please use the maturity criteria)</i>	Responsibility
[Design Requirement]	System Requirement Document-SRD ( or Sub-SRD)	System Requirement Document-SRD	complete	IO
[Design Requirement]	Interface Control Document-ICD	Interface Control Document-ICD	complete	IO
[Design Requirement]	Interface Sheet-IS	Interface Sheet-IS	complete	IO/Contractor
[Design Requirement]	Configuration Management Model-CMM	Please provide CMAF Ref	complete	IO
[Design Requirement]	System Lead Specification	Lead Specification	complete	IO
[Design Definition]	System Design Description-DDD	System Design Description-DDD	complete	IO
[Design Definition]	System Layout Drawing	System layout drawing	complete	Contractor
[Design Definition]	Building Drawing	Site & Building Drawing	complete	Contractor
[Design Definition]	Process Flow Diagram-PFD	Process Flow Diagram-PFD	complete	IO
[Design Definition]	Piping and Instrumentation Diagram-PID	Piping and Instrumentation Diagram-PID	complete	IO
[Design Definition]	Single Line Diagram or One Line Diagram	Single Line Diagram	complete	Contractor
[Design Definition]	Cabling Diagram-CBD	Cabling Diagram-CBD	complete	IO
[Design Definition]	Detailed Wiring Diagram-WD	Detailed Wiring Diagram-WD	complete	IO
[Design Definition]	Plant System Instrumentation and Control Specification	Technical Requirement Specification	complete	Contractor
[Design Definition]	Instrumentation and Control - List of Signals	Instrumentation and Control Document	complete	Contractor
[Design Definition]	List of Data at Central Instrumentation and Control Interface	Instrumentation and Control Document	complete	Contractor
[Design Definition]	Cubicle Hardware Configuration Diagram	Instrumentation and Control Document	complete	Contractor
[Design Definition]	Description of Plant System State Machine	Instrumentation and Control Document	complete	IO
[Design Definition]	Instrumentation and Control - Physical and Functional Architecture	Instrumentation and Control Document - Physical and Functional Architecture	complete	Contractor
[Design Definition]	Equipment or Component List	Component List	complete	Contractor
[Design Definition]	Bill of Material - BOM	Bill of Material - BOM	complete	Contractor
[Design Definition]	Component Technical Specification	Technical Requirement Specification	complete	Contractor
[Design Definition]	Assembly Drawing	Piping Isometric Drawing	complete	Contractor
[Design Definition]	Assembly Drawing	Support Drawing	complete	Contractor
[Design Definition]	Cubicle Internal Definition	Cubicle Internal Definition	complete	Contractor
[Design Justification]	Design Justification Plan-DJP	Verification and Validation Plan	complete	IO
[Design Justification]	Design Compliance Matrix - DCM	Compliance Matrix - DCM or VCM or ICM	complete	IO
[Design Justification]	Interface Compliance Matrix	Compliance Matrix - DCM or VCM or ICM	complete	IO
[Design Justification]	Calculation report for flow	Calculation	complete	IO
[Design Justification]	In vessel support structural analysis	Engineering Analysis	complete	IO
[Design Justification]	Ex vessel support structural analysis	Engineering Analysis	complete	Contractor
[Design Justification]	Ex vessel pipe stress analysis	Engineering Analysis	complete	Contractor
[Design Justification]	In vessel pipe stress analysis	Engineering Analysis	complete	Contractor
[Design Justification]	Hazard Identification and Risk Analysis (HIRA)	Engineering Analysis	complete	IO
[Design Justification]	RAMI Analysis	Engineering Analysis	complete	IO
[Design Justification]	Hazard and Operability Study (HAZOP)	Engineering Analysis	complete	IO
[Design Justification]	Human and Organizational Factor Analysis (HOF)	Engineering Analysis	complete	IO
[Design Justification]	Remote Handling Compatibility Report (Remote Handling Compatibility Assessment Report, Mock up example)	Engineering Analysis	complete	IO
[Design Justification]	Qualification Plan	Qualification Plan	complete	IO
[Design Justification]	Acceptance Plan (FAT, SAT)	FAT & SAT Plan and Procedure	complete	IO
[Design Justification]	Requirement Validation Matrix	Compliance Matrix - DCM or VCM or ICM	complete	IO
[Design Justification]	ROI and Research and Development Report	ROI and Research and Development Report	complete	IO
[Commissioning]	System Commissioning Plan	Commissioning Plan	complete	IO
[Commissioning]	Commissioning Test Procedure	Commissioning Test Procedure	complete	IO
[Manufacturing]	Part Drawing	Part Drawing	complete	Contractor
[Assembly and Installation]	Installation Drawing	Installation Drawing	complete	Contractor
[Assembly and Installation]	Assembly or Installation Plan	Installation Execution Document	complete	Contractor
[Operation and Maintenance]	Concept of Operation	Concept of Operation	complete	IO
[Operation and Maintenance]	System Maintenance and In-Service Inspection Plan	System Maintenance and In-Service Inspection Plan	complete	Contractor
[Decommissioning]	Decommissioning Plan	Decommissioning Document	complete	IO
[Decommissioning]	Shutdown Checklist	Decommissioning Document	complete	IO
<b>Non Technical Documents</b>				
[Other]	Issue or Risk or Opportunity Analysis Report	Please Provide PROR Data Base Link	complete	IO

The IO shall review and approve the list of deliverables.

### 16.3.2 Expected list of deliverables for the Boronization MRR

The MRR preparation and list of deliverables shall be proposed by the Contractor in accordance with the Template for SDR Input Data Package [21]. A representative example of the Boronization System MRR List of deliverables and Activity responsibility is shown below for the purpose of supplier cost estimation.

Aspect <i>Select the main Aspect to guide you to the Document selection.</i>	Expected Document	ICP Doc Type	MRR Maturity <i>(Please don't change values)</i>	Responsibility
[Design Requirements]	Configuration Management Model-CMM	Please provide CMAF Ref	If Useful	IO
[Design Definition]	Building Drawing	Site & Building Drawing	Complete	Contractor
[Design Definition]	Cabling Diagram-CBD	Cabling Diagram-CBD	Complete	Contractor
[Design Definition]	Detailed Wiring Diagram-WD	Detailed Wiring Diagram-WD	Complete	Contractor
[Design Definition]	Instrumentation and Control Document	Instrumentation and Control Document	Complete	Contractor
[Design Definition]	Instrumentation and Control - Physical and Functional Architecture	Instrumentation and Control Document - Physical and Functional Architecture	Complete	Contractor
[Design Definition]	Equipment or Component List	Component list	Complete	Contractor
[Design Definition]	Bill of Material - BOM	Bill of Material - BOM	Complete	Contractor
[Design Definition]	Component Technical Specification	Technical Requirements Specification	Complete	Contractor
[Design Definition]	Assembly Drawing	Piping Isometric Drawing	Complete	Contractor
[Design Definition]	Assembly Drawing	Support Drawing	Complete	Contractor
[Design Definition]	Assembly Drawing	Assembly Drawing	Complete	Contractor
[Design Definition]	Cubicle Internal Definition	Cubicle Internal Definition	Complete	Contractor
[Design Justification]	Compliance Matrix - DCM or VCM	Compliance Matrix - DCM or VCM or ICM	Complete	IO
[Design Justification]	Qualification Plan	Qualification Plan	Complete	IO
[Design Justification]	Qualification Summary Report for PIC Comp	Qualification Synthesis Report for PIC Component	Complete	IO
[Design Justification]	Acceptance Plan (FAT, SAT)	FAT & SAT Plan and Procedure	Complete	IO
[Design Justification]	Factory Acceptance Test Procedure	FAT & SAT Plan and Procedure	Complete	IO
[Manufacturing]	Manufacturing Inspection Plan-MIP	Manufacturing Inspection Plan-MIP	Complete	Contractor
[Manufacturing]	Manufacturing Instruction or Procedure	Manufacturing execution document	Complete	Contractor
[Manufacturing]	Non-destructive Examination Procedure	Manufacturing execution document	Complete	Contractor
[Manufacturing]	List of Manufacturing Tools and Equipment	Manufacturing execution document	Complete	Contractor
[Manufacturing]	Manufacturing Process Qualification Repo	Manufacturing execution document	Complete	Contractor
[Manufacturing]	Training or Qualification Record	Manufacturing execution document	Complete	Contractor
[Manufacturing]	Data Sheet	Manufacturing execution document	Complete	Contractor
[Manufacturing]	Manufacturing Drawing	Manufacturing Drawing	Complete	Contractor
[Manufacturing]	Part Drawing	Part Drawing	Complete	Contractor
[Operation and Maintenance]	Operation and Maintenance Manual	Equipment Operation and maintenance Manual	Preliminary	IO

[Design Justification]	Structural Integrity Report	Engineering Analysis	Complete	Contractor	In vessel support structural analysis
[Design Justification]	Structural Integrity Report	Engineering Analysis	Complete	Contractor	Ex vessel supports structural analysis
[Design Justification]	Structural Integrity Report	Engineering Analysis	Complete	Contractor	Ex vessel pipe stress analysis
[Design Justification]	Structural Integrity Report	Engineering Analysis	Complete	Contractor	In vessel pipe stress analysis
[Design Justification]	Hazard Identification and Risk Analysis (HIRA)	Engineering Analysis	Complete	IO	
[Design Justification]	RAMI Analysis	Engineering Analysis	Complete	IO	
[Design Justification]	Hazard and Operability Study (HAZOP)	Engineering Analysis	Complete	IO	
[Design Justification]	Human and Organisational Factor Analysis (HOF)	Engineering Analysis	Complete	IO	
[Design Justification]	Remote Handling Compatibility Report (Remote Handling Compatibility Assessment Report, Mock up report)	Engineering Analysis	Complete	IO	
[Design Justification]	Qualification Plan	Qualification Plan	Preliminary	IO	
[Design Justification]	Acceptance Plan (FAT, SAT)	FAT & SAT Plan and Procedure	Preliminary	IO	
[Design Justification]	Requirement Validation Matrix	Compliance Matrix - DCM or VCM or ICM	Complete	IO	
[Design Justification]	RDX and Research and Development Report	RDX and Research and Development Report	If Useful	IO	
[Commissioning]	System Commissioning Plan	Commissioning Plan	Complete	IO	
[Commissioning]	Commissioning Test Procedure	Commissioning Test Procedure	Preliminary	IO	
[Manufacturing]	Part Drawing	Part Drawing	Preliminary	Contractor	
[Assembly and Installation]	Installation Drawing	Installation Drawing	Complete	Contractor	
[Assembly and Installation]	Assembly or Installation Plan	Installation Execution Document	Complete	Contractor	
[Operation and Maintenance]	Concept of Operations	Concept of Operation	Complete	IO	
[Operation and Maintenance]	System Maintenance and In-Service Inspection Plan	System Maintenance and In-Service Inspection Plan	Complete	Contractor	
[Decommissioning]	Decommissioning Plan	Decommissioning Document	Complete	IO	
[Decommissioning]	Radwaste Checklist	Decommissioning Document	Complete	IO	
<b>Non Technical Documents</b>					
[Other]	Issue or Risk or Opportunity Analysis Report	Please Provide PROR Database Link	At any stage	IO	

The IO shall review and approve the list of deliverables

### 16.3.3 Expected list of deliverables of the I&C design

The control system of the Boronization system and Xe gas delivery system is expected to be a replica of the GIS I&C system.

The deliverables shall be prepared as per the PCDH guidelines [Plant Control Design Handbook \(27LH2V\)](#) and [Methodology for Plant System I&C specifications \(353AZY\)](#).

This document completes the PCDH core document by focusing on methodology for plant system I&C technical specifications. It aims to give guidelines to issue the deliverables for the design phase as mentioned in PCDH, scope and workflow for I&C design data.

### 16.3.4 Expected list of deliverables for the Xenon gas supply FDR

The FDR preparation and list of deliverables shall be proposed by the Contractor in accordance with the DR procedure [18], the SDP Working Instruction [19] and the Template for SDR Input Data Package [20]. A representative example of the Xenon gas supply System FDR List of deliverables and Activity responsibility is shown below for the purpose of supplier cost estimation.

Aspect	ICP Doc Type	Title	Responsibility
[Design Definition] (A. Design Requirements)	Technical Requirements Specification	SRD	IO
[Design Definition] (A. Design Requirements)	Configuration Management Model-CMM	CMM	IO
[Design Definition] (B. Design Description)	Design Description	DDD	IO
[Design Definition] (B. Design Description)	Load Specification	Load Specifications	IO
[Design Definition] (B. Design Description)	Component Technical specifications	Technical Specification for Bellows Procurement	IO/Supplier
[Design Definition] (B. Design Description)	Process Diagram	PFD	IO
[Design Definition] (B. Design Description)	Process Diagram	P&IDs	IO
[Design Definition] (B. Design Description)	Instrumentation and Control Diagram	Cabling diagrams	IO
[Design Definition] (B. Design Description)	Bill Of Material-BOM	BOM	Supplier
[Design Definition] (B. Design Description)	Design Description	Engineering models and drawings	Supplier
[Definition Justification]	Verification Report	Compliance Matrix	Supplier
[Definition Justification]	Functional Analysis Report-FAR	Functional Analysis Report-FAR	IO
[Definition Justification]	Engineering Analysis and Calculation Report	Structural Integrity analysis report	Supplier
[Definition Justification]	Engineering Analysis and Calculation Report	Leak Detection Scheme and Analyses	IO
[Definition Justification]		RAMI	IO
[Definition Justification]		HAZOP	IO
[Definition Justification]		HIRA	IO
[Manufacturing]	Assembly drawing	Assembly Drawings	Supplier
[Manufacturing]	Other Manufacturing Input	Factory Qualification Tests Plan	Supplier
[Manufacturing]	Part drawing	Part drawings	Supplier
[Assembly and Installation]		On-site Assembly Plan	Supplier
[Assembly and Installation]		He Leak Testing on Site Assembly	Supplier
[Operation and Maintenance]	Concept of Operations	Operations plan	IO
[Operation and Maintenance]	Maintenance or Inspection Plan	Maintenance Plan	IO
[Product Lifecycle Records] (B. Procurement)	Deliverable List (Review or Decision or Recommendations Report)	Deliverable List	IO

### 16.3.5 Expected list of deliverables for the Xenon gas supply MRR

The MRR preparation and list of deliverables shall be proposed by the Contractor in accordance with the Template for SDR Input Data Package [21]. A representative example of the Xenon Gas Supply System MRR List of deliverables and Activity responsibility is shown below for the purpose of supplier cost estimation.

Aspect <i>Select the main Aspect to guide you to the Document selection.</i>	ICP Doc Type	Title	Responsibility	Notes
[Design Justification]	FAT & SAT Plan and Procedure	Factory Acceptance Test Program	IO	
		Site Acceptance Test Program	IO	
[Manufacturing]	Manufacturing Inspection Plan-MIP	Manufacture Inspection Plan	IO/Supplier	IO to define Notification and Hold Points
[Manufacturing]	Manufacturing execution document	Welding Procedure	Supplier	
		Welding Process Specification	Supplier	
		Helium Leak Test Procedure	Supplier	
[Manufacturing]	Manufacturing execution document	Liquid Penetrant Examination Procedure	Supplier	
		Visual Examination Procedure	Supplier	
		Radiographic Examination Procedure	Supplier	
[Manufacturing]	Manufacturing execution document	Welding Qualification Report	Supplier	
[Manufacturing]	Manufacturing execution document	Personnel Qualification	Supplier	
[Manufacturing]	Manufacturing Drawing	Manufacturing Drawings	Supplier	
[Other]		Quality Plan	IO/Supplier	

## 16.4 Appendix 4 – Installation and Construction Work Packages

[EWP Toolbox link](#) [25]

The contractor shall follow the instructions in the tool box to implement according to IO process Engineering Work Package (EWP) Toolbox

Created by Dussanrat Pierre-yves EXT, last updated by Andreani Marion on 2025-04-07 • 1 minute read

